



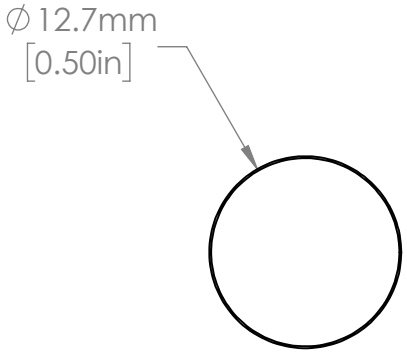

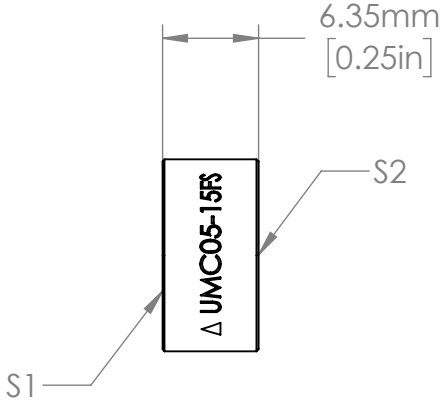

NOTES/SPECIFICATIONS:

1. CLEAR APERTURE: > 80% DIAMETER
2. SURFACE FLATNESS (S1): λ/4 AT 632.8 nm OVER CLEAR APERTURE
3. SURFACE QUALITY (S1): 15-5 SCRATCH-DIG
4. SURFACE (S2): POLISHED
5. PARALLELISM: ≤ 3 arcmin
6. THICKNESS TOLERANCE: ±0.10 mm
7. DIAMETER TOLERANCE: +0.00/-0.10 mm
8. COATING (S1)
   DESIGN WAVELENGTH RANGE: 650 nm - 1050 nm
   AOI: 10°
   R_s AND R_p: > 99.5% OVER WAVELENGTH RANGE
   GDD: -1.5 mm FUSED SILICA (-54 fs^2 @ 800 nm)

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	EH	11/FEB/19
APPROVAL	JE	29/MAY/19

COPYRIGHT © 2019 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

∅12.7 mm CHIRPED MIRROR
650 nm - 1050 nm, 10° AOI

MATERIAL	REV
FUSED SILICA	C

ITEM #	APPROX WEIGHT
UMC05-15FS	2 g